







Meden-Inmed was founded in 1989 as a company employing two people. Since then, it has gained a strong market position through hard work and reliability. Initially a small distributor of a few renowned manufacturers, now a dynamic medium-sized company with over 300 employees - professionals in the fields of electronics, mechanics, economy, sales and marketing. In 2019, the company will celebrate its 30<sup>th</sup> anniversary.

Modern rehabilitation combines specialized knowledge with state of the art technology. We knew that when we started our own production plant in 1996 and are even more convinced of it now, when we create new products and widen our offer of medical devices each year. We make sure they are modern, efficient, comfortable and user friendly. We are always happy to see new ideas turn into new products.

Every product we have sold proves the trust our customers have placed in us. Behind every device we deliver there is a long-term relationship. Our customers consciously select a supplier that not only delivers the equipment, but can also guarantee quality and professional service. It has always been our duty and our motto.

To address the growing needs of our customers we have now expanded the range of our products. Our goal is to deliver you complete range of equipment required by professionals in the field of rehabilitation. This catalogue shows just a part of our offer and is dedicated to professional equipment for kinesiotherapy.

We will help you choose the best equipment that is tailored to your needs. Let this catalogue be your guide to our products. Meden-Inmed's Team will assist you in every matter of our cooperation. We are always here to hear your voice. Your feedback is always welcome and appreciated.

**Ph.D. Eng. Wiesław Zinka**  
President  
Meden-Inmed Company

**Maciej Zinka**  
Vice President  
Sales & Marketing

## Our awards:



**European Medal 2016, 2015, 2014, 2013, 2012, 2011, 2010, 2009, 2008, 2007**

European Economic and Social Committee and Business Center Club



**Diamond of FORBES Magazine 2009**



**Ambassador of Polish Economy in category:**

**Exporter, 2014  
XXI century solution creator, 2013  
Partner of foreign companies, 2012**



**Perfect Line 2009 SPA Business**



**Gazelle of Business 2008  
Gazelle of Business 2007  
Gazelle of Business 2006**



**Awards of biggest rehabilitation equipment fairs in Poland - Rehabilitacja Fairs**

**XXII Rehabilitation Fair Łódź 2014  
XXI Rehabilitacja Łódź 2013  
XVI Rehabilitacja Łódź 2008  
XV Rehabilitacja Łódź 2007  
XIV Rehabilitacja Łódź 2006  
XIII Rehabilitacja Łódź 2005  
X Rehabilitacja Łódź 2002  
VIII Rehabilitacja Łódź 2000**



**5th rank on the list of 100 best companies in the region**

II Euroregional Economic Presentation Szczecin 2002



**Investment of the year 2009**

Polish Federation of Engineering Associations



**Product of West Pomerania 2015, 2012, 2010, 2009  
Product of Pomerania 2009, 2008, 2007**

Polish Federation of Engineering Associations



**Product of Koszalin 2014, 2013, 2010, 2009, 2008, 2007, 2006**

Polish Federation of Engineering Associations



**Denar 2015  
Denar 2014**

Koszalin Chamber of Industry and Commerce



**Pioneer Distributor Award 2017**

Business Centre Club



**Leader of Polish business 2016**

Business Center Club

# Aqua Whirl WKG | Whirlpool bath tub for upper limbs



Tubs are perfect for hydro massage treatment of limbs and post-injury conditions, in nervous system disorders or muscular and nervous system fatigue.

## Standard accessories:

- Swivel chair



Packing dimensions: **93 x 100 x 160 cm** Weight: **+20 kg**



Length: **90 cm**



Height: **92 cm**



Width: **95 cm**



Weight: **50 kg**




Capacity: **48 l**

## Features:

- Basin available in two colours: white or calypso green
- Basin made of high quality acrylic (fibreglass mat reinforced)
- Economical use of water – min. 43 l, max. 48 l
- Effective hydro massage therapy via 44 nozzles
- „Dry-run“ pump protection system
- Adjustable air supply system for the water nozzles
- Electronically controlled descaling system
- Timer: 1-9h:59 min
- Electronic control panel
- Short filling and draining time
- Big diameter drain and filling system
- Semi-automatic draining system
- Temperature sensor
- Water level sensor
- Shower
- Smooth, profiled treatment chamber
- Ergonomic design
- Automatic filling (option)

## Technical data:

Treatment capacity [l]:	ca. 40
Volume up to overflow [l]:	48
Filling / drainage [min.]:	1,3/0,7
Number of aeration nozzles:	44
Power consumption [kW]:	0,9
Supply voltage [V/Hz]:	230/50
Dimensions (L x W x H) [cm]:	90 x 95 x 92
Weight [kg]:	50

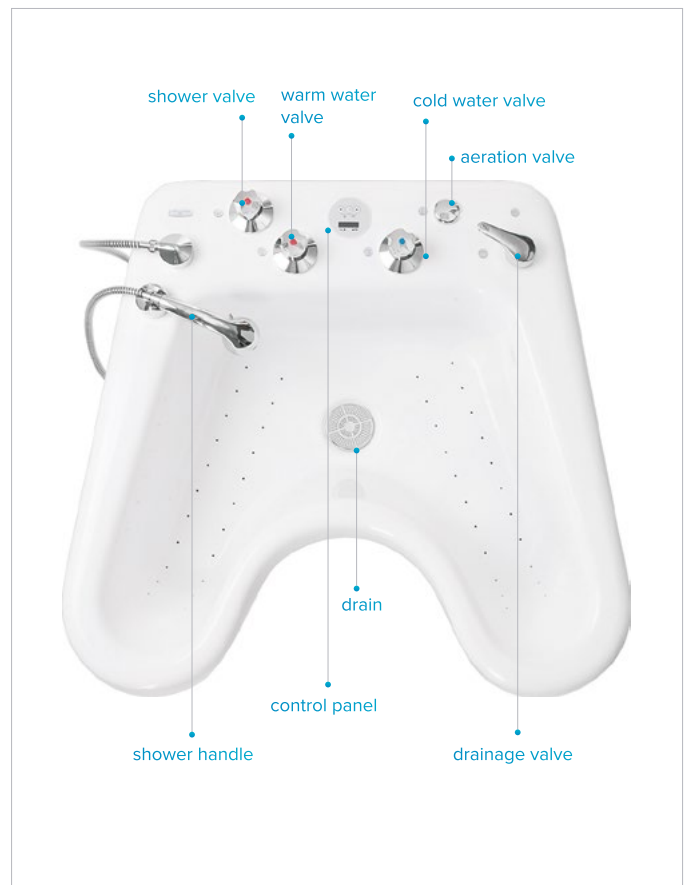

# Aqua Whirl WKS | Whirlpool bath tub for lower limbs



Tubs are perfect for hydro massage treatment of limbs and post-injury conditions, in nervous system disorders or muscular and nervous system fatigue.



Packing dimensions: **94 x 103 x 135 cm** Weight: **+20 kg**



Length: **98 cm**



Height: **62 cm**



Width: **90 cm**



Weight: **49 kg**



Capacity: **62 l**

## Standard accessories:

- Swivel chair

## Features:

- Basin available in two colours: white or calypso green
- Basin made of high quality acrylic (fibreglass mat reinforced)
- Economical use of water – min. 40 l, max. 62 l
- Effective hydro massage therapy via 38 nozzles
- Adjustable air supply system for the water nozzles
- „Dry-run“ pump protection system
- Electronically controlled descaling system
- Electronic control panel
- Timer: 1-9h:59 min
- Short filling and draining time
- Big diameter drain and filling system
- Semi-automatic draining system
- Temperature sensor
- Water level sensor
- Shower
- Smooth, profiled treatment chamber
- Ergonomic design
- Automatic filling (option)

## Technical data:

Treatment capacity [l]:	ca. 40
Volume up to overflow [l]:	62
Filling / drainage [min.]:	1,7/0,7
Number of aeration nozzles:	38
Power consumption [kW]:	0,9
Supply voltage [V/Hz]:	230/50
Dimensions (L x W x H) [mm]:	98 x 90 x 62
Weight [kg]:	49



# Aqua Whirl WKD

Whirlpool bath tub for lower extremities



Tubs are perfect for hydro massage treatment of limbs and post-injury conditions, in nervous system disorders or muscular and nervous system fatigue.

## Standard accessories:

- Steps



Packing dimensions: **80 x 120 x 120 cm** Weight: **+20 kg**



Length: **118 cm**



Height: **81 cm**



Width: **62 cm**



Weight: **56 kg**



Capacity: **154 l**

## Features:

- Basin available in two colours: white or calypso green
- Basin made from gelcoat (fibreglass mat reinforced)
- Economical use of water – min. 120 l, max. 154 l
- Effective hydro massage therapy via 6 adjustable direction jet nozzles
- „Dry-run” pump protection system
- Massage intensity adjustment by supplying air to the jet nozzles
- Electronically controlled descaling system
- Electronic control panel
- Timer: 1-9h:59 min
- Temperature sensor
- Water level sensor
- Automatic filling
- Semi-automatic draining system
- Shower
- Smooth, profiled treatment chamber
- Ergonomic design

## Technical data:

Treatment capacity [l]:	ca. 120
Volume up to overflow [l]:	154
Filling / drainage [min.]:	4/3
Number of aeration nozzles:	6
Power consumption [kW]:	0,9
Supply voltage [V/Hz]:	230/50
Dimensions (L x W x H) [cm]:	118 x 62 x 81
Weight [kg]:	56



# Aqua Whirl WKR | Whirlpool bath tub for lower extremities and spine



Tubs are perfect for hydro massage treatment of limbs and post-injury conditions, in nervous system disorders or muscular and nervous system fatigue. It delivers effective 2-zone massage.

## Standard accessories:

- Steps



Packing dimensions: **80 x 120 x 120 cm** Weight: **+20 kg**



Length: **116,5 cm**



Height: **95,2 cm**



Width: **68 cm**



Weight: **75 kg**



Capacity: **210 l**

## Features:

- Basin available in two colours: white or calypso green
- Basin made from gelcoat (fibreglass mat reinforced)
- Economical use of water – min. 75 l, max. 210 l
- Effective hydro massage therapy via 12 adjustable direction jet nozzles
- 2 levels of massage: I: lower limbs (75/145 l), II: lower limbs + spine
- „Dry-run” pump protection system
- Massage intensity adjustment by supplying air to the jet nozzles (independently for each zone)
- Electronically controlled descaling system
- Electronic control panel
- Timer: 1-9h:59 min
- Temperature sensor
- Water level sensor
- Automatic filling
- Semi-automatic draining system
- Shower
- Smooth, profiled treatment chamber
- Ergonomic design

## Technical data:

Treatment capacity [l]:	75-210
Volume up to overflow [l]:	210
Filling / drainage [min.]:	2/3,5
Number of aeration nozzles:	12
Power consumption [kW]:	1,5
Supply voltage [V/Hz]:	230/50
Dimensions (L x W x H) [cm]:	116,5 x 68 x 95,2
Weight [kg]:	75






# Aquanea | Therapeutic bath tub for SPA and thalassotherapy



**Aquanea** - therapeutic bath tub for SPA and thalassotherapy applications with automatic zone hydro massage is a blend of the newest technology, modern design and ergonomic shape.

## Standard accessories:

- Steps
- Headrest



## Features:



- Basin available in two colours: white or calypso green
- Basin made of gelcoat (fiberglass mat reinforced)
- Economical use of water during treatment - min. 180l, max. 250l,
- 188 hydro massage nozzles working simultaneously
- 62 aeration nozzles with intensity adjustment
- Massage intensity adjustment by supplying air to the nozzles
- Ozone generator
- Automatic disinfecting and descaling system
- „Dry-run” pump protection system
- Automatic canal's rinsing and drying system
- Automatic filling with a thermostat
- Automatic draining
- 2 temperature sensors (measurement while filling the bath and during the treatment)
- 2 water level sensors
- Timer: 10-30 min
- Multifunctional electronic control panel with easily accesible menu
- Shower
- One button start

## Treatment possibilities:

- Whirl massage via 188 nozzles,
- Air bubble massage - aeration via a system of 62 nozzles,
- Chromotherapy (CHROMO),
- Baths in clear water or with addition of mineral salts, algae etc. (AROMA),
- Possibility to combine some functions (e.g. air bubble bath with ozone).

## Technical data:

Treatment capacity [l]:	180-250
Volume up to overflow [l]:	275
Filling / drainage [min]:	<4
Power consumption [kW]:	3,6
Supply voltage [V/Hz]:	400/50
Dimensions (L x W x H) [mm]:	243 x 115 x 85
Weight [kg]:	220

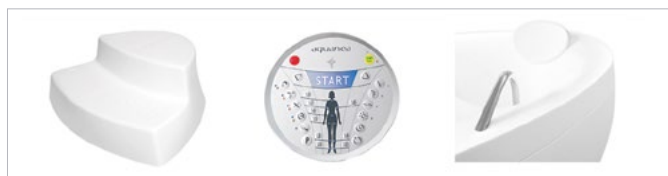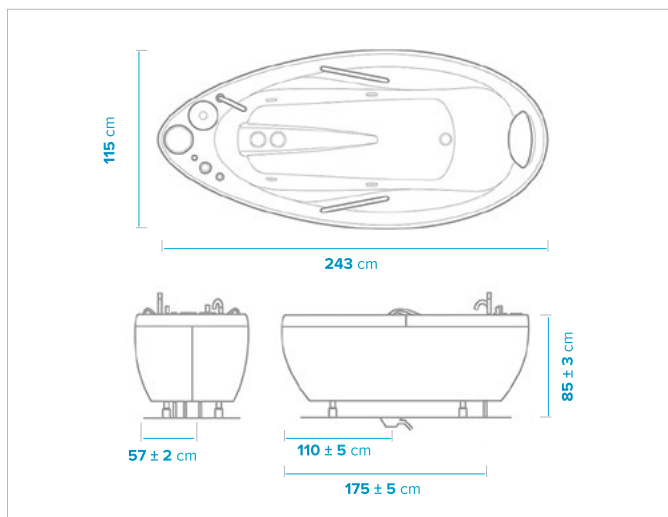


## Additional options:

- ZONES 9:** 9 independent zones, 5 standard programs, 3 user programs
- CHROMO 2R:** chromotherapy: 2 lamps
- CHROMO 4R:** chromotherapy: 4 lamps
- CHROMO 12:** chromotherapy: 12 single light sources
- CHROMO 24:** chromotherapy: 24 single light sources
- CHROMO 36:** chromotherapy: 36 single light sources
- AUDIO:** sound input from an external device such as Hi-Fi, mp3 etc.
- AROMA:** scent container, dosage during treatment by pressing a button





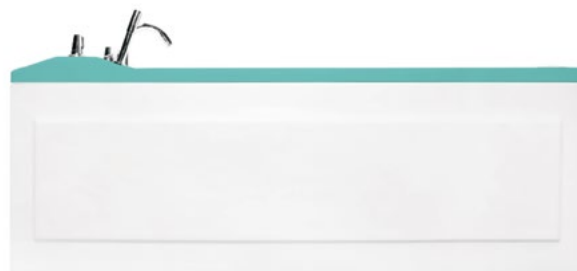


# Orionmed | Bath tub for body relaxation and healing massage




**Orionmed** is one of the most versatile hydrotherapy bath tubs available on the market. Ergonomic design ensures treatment very comfortable for the patient, it also provides low water consumption. **Orionmed** bath tub is designed to provide relaxation and therapeutic hydromassage all over body in three independent zones, manual whip underwater massage, pearl bath and chromotherapy treatments.

 Packing dimensions: **240 x 120 x 129 cm** Weight: **+40 kg**

 Length: **214 cm**

 Height: **85 cm**

 Width: **85 cm**

 Weight: **170 kg**

 Capacity: **320 l**

## Features:

- Basin available in two colours: white or calypso green
- Basin made of high quality acrylic (fibreglass mat reinforced)
- Economical use of water – min. 160 l, max. 280 l
- 26 nozzles for hydro massage divided into 3 independent zones (8, 8, 10 nozzles)
- 126 aeration nozzles for air bubble massage (with intensity adjustment)
- Massage intensity adjustment by supplying air to the nozzles independently for each zone
- Timer: 5-30 min.
- Ozone generator
- Independent air pump
- Disinfection and descaling system
- Automatic filling
- Semi-automatic drainage - water discharge lever
- „Dry-run” pump protection system
- Draining system for removing water from the piping system
- Easy accessible modern colour touch panel
- 2 temperature sensors (measurement while filling the bath and during the treatment)
- Heating system maintains water temperature automatically
- Warm and cold water shower
- Rails for palm support and specially shaped parts for arms and legs that facilitate appropriate body position during treatment sessions
- 2 water level sensors
- 3 standard programs: P1, P2, P3, 1 user program (P4)


## Technical data:

Treatment capacity [l]:	160-280
Volume up to overflow [l]:	320
Filling / drainage [min]:	ca. 4
Power consumption [kW]:	4,5
Water jet pressure [bar]:	0-3,5
Supply voltage [V/Hz]:	230/50
Dimensions (L x W x H) [cm]:	214 x 85 x 85
Weight [kg]:	170 (195 fully equipped)

## Standard accessories:

- Steps
- Headrest

## Sections:

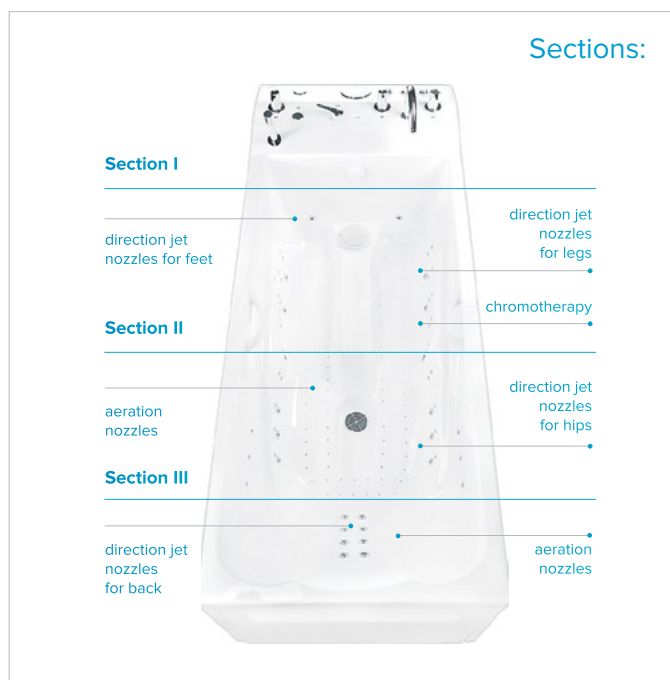

## Additional options:

- HOSE:** jet hose for manual massage
- CHROMO 2R:** chromotherapy: 2 lamps
- CHROMO 12:** chromotherapy: 12 single light sources
- CHROMO 24:** chromotherapy: 24 single light sources
- CHROMO 36:** chromotherapy: 36 single light sources
- AUDIO:** sound input from an external device such as Hi-Fi, mp3 etc.
- AROMA:** scent container, dosage during treatment by pressing a button
- FOOTREST:** support for feet



# Aquameden | Underwater massage bath tub



Elegant, robust body made of high quality acrylic resin reinforced with polyester laminate and seated on 4 adjustable height supports with rubber protective caps. Four sides of the bath tub protected by shaped laminate covers.



Packing dimensions: **255 x 135 x 129 cm** Weight: **+50 kg**



Length: **235 cm**



Height: **96 cm**



Width: **100 cm**



Weight: **195 kg**



Capacity: **550 l**

## Features:

- Basin available in two colours: white or calypso green
- Basin made of high quality acrylic (fibreglass mat reinforced)
- Underwater massage jet hose
- Replaceable nozzle tips for the jet hose (option)
- Pressure indicator (up to 4,5 bar)
- Optional hydro massage: 8 side direction jet nozzles + 3 direction jet nozzles for back
- Massage intensity adjustment by supplying air to the nozzles
- „Dry-run” pump protection system
- Electronic control panel
- Timer: 1-9h:59 min.
- Water level sensor
- Water supply system using copper and PVC pipes (except connectors and valves)
- Automatic water installation disinfection system
- 2 water temperature sensors (readings taken while the tub fills up with water and during the treatment)
- Railings and feet supports helping to maintain proper body position during treatment
- Shower

## Technical data:

Treatment capacity (minimum) [l]:	250
Volume up to overflow [l]:	550
Filling / drainage [min]:	6,0/4,5
Water jet pressure [bar]:	0-4,5
Power consumption [kW]:	2,4
Supply voltage [V/Hz]:	230/50
Dimensions (L x W x H) [cm]:	235 x 100 x 96
Weight [kg]:	195

## Standard accessories:

- Steps

## Treatment possibilities:

- Manual underwater massage using a water jet with stepless water pressure control
- Automatic hydromassage using hydromassage nozzles (JETS 11)
- Chromotherapy (CHROMO)
- Aromatherapy (AROMA)



## Additional options:

- AIR 56:** 56 aeration nozzles to air bubble massage, independent air pump
- JETS 11:** 11 nozzles for automatic hydro massage (2 x 4 for side + 3 for back)
- CHROMO 2R:** chromotherapy: 2 lamps
- CHROMO 4R:** chromotherapy: 4 lamps
- CHROMO 12:** chromotherapy: 12 single light sources
- CHROMO 24:** chromotherapy: 24 single light sources
- CHROMO 36:** chromotherapy: 36 single light sources
- AUDIO:** sound input from an external device such as Hi-Fi, mp3 etc.
- AROMA:** scent container, dosage during treatment by pressing a button




# Orionmed Balneo


Bath tub for balneological hydromassage



Thanks to the new balneological bath tub **Orionmed Balneo** saline baths can be enriched with effective hydromassage with directional jets.

 Packing dimensions: **240 x 120 x 129 cm** Weight: **+40 kg**

 Length: **214 cm**

 Height: **85 cm**

 Width: **85 cm**

 Weight: **160 kg**

 Capacity: **320 l**

## Features:

- Basin available in two colours: white or calypso green
- Basin made of high quality acrylic (fibreglass mat reinforced) - saline influence-resistant
- Economical use of water during treatment (160-280 l)
- 26 nozzles for hydro massage without zones (all nozzles work simultaneously)
- Colour touch panel
- Timer: 5-30 min
- „Dry-run” pump protection system
- Disinfection and descaling system
- Automatic filling, draining
- Draining system for removing water from the piping system
- 2 temperature sensors (measurement while filling the bath and during the treatment)
- Special pump and fittings elements adapted to saline waters
- Rails for palm support and specially shaped parts for arms and legs that facilitate appropriate body position during treatment sessions
- Shower
- 2 water level sensors

## Technical data:

Treatment capacity [l]:	160-280
Volume up to overflow [l]:	320
Filling / drainage [min]:	<2 / ca. 4
Power consumption [kW]:	2,1
Supply voltage [V/Hz]:	230/50
Dimensions (L x W x H) [mm]:	214 x 85 x 85
Weight [kg]:	160 (175 fully equipped)

## Standard accessories:

- Headrest
- Steps

## Treatment options:

- Balneotherapy: sodium chloride waters (saline waters), thermal waters, baths with addition of liquid mud (special liquid concentrate)
- Balneotherapy massage or regular water massage
- Beer baths
- Chromotherapy (CHROMO)
- Music therapy (AUDIO)

## Brine baths - indications:

- Rheumatoid disease
- Joints and spine degenerations
- Post-traumatic osteoarthritis
- Increased muscle tone
- Neurosis
- Recurring respiratory infections
- Peripheral circulatory disorders

## Additional options:

**CHROMO 2R:** chromotherapy: 2 lamps

**CHROMO 12:** chromotherapy: 12 single light sources

**CHROMO 24:** chromotherapy: 24 single light sources

**CHROMO 36:** chromotherapy: 36 single light sources

**AUDIO:** sound input from an external device such as Hi-Fi, mp3 etc.

**FOOTREST:** support for feet



# Aquaray

Bath tub for automatic hydromassage



**AQUARAY** is a modern therapeutic tub with sophisticated design, specially dedicated to perform hydrotherapy treatments in rehabilitation centres, Medical SPA & Wellness centres and for private sector. Even demanding clients will be satisfy with the visual effect of the tub. They also will be satisfied with the treatment possibilities of it.

Packing dimensions: **240 x 120 x 129 cm** Weight: **+40 kg**

Length: **225 cm**

Height: **91 cm**

Width: **88 cm**

Weight: **170 kg**

Capacity: **320 l**

## Features:

- Basin available in two colours: white or calypso green
- Basin made of gelcoat (fiberglass mat reinforced)
- Economical use of water – min. 160 l
- 24 nozzles for hydro massage working simultaneously
- Massage intensity adjustment by supplying air to the nozzles
- 98 aeration apertures for air bubble massage (14x7 apertures)
- Automatic disinfection
- Automatic filling
- Automatic drainage
- 3 standard programs: P1, P2, P3, user programs (P4-P20)
- Easy accessible modern colour touch panel
- 2 temperature sensors
- Water level sensor
- Shower
- Rails for palm support and specially shaped parts for arms and legs that facilitate appropriate body position during treatment sessions
- Support for feet

## Technical data:

Treatment capacity (minimum) [l]:	160
Volume up to overflow [l]:	320
Filling* [min]:	ca. 3
Drainage [min]:	ca. 2,5
Power consumption [kW]:	max. 5
Supply voltage [V/Hz]:	230/50
Dimensions (L x W x H) [cm]:	225 x 88 x 91
Weight [kg]:	170 (195 equipped with pump and jet hose)

\* to the minimal water level - depending on the pressure in the piping (recommended flow ~ 70 l/min)

## Options:

- 24 nozzles for hydro massage divided into 3 zones
- 36 nozzles for hydro massage divided into 5 zones
- Jet hose (switched independently; additional pump)\*
- Cascade nozzle (switched independently; additional pump)\*
- Ozone generator
- Heater

\* when ordered: jet hose and cascade nozzle – only one additional pump is needed

## Standard accessories:

- Steps
- Headrest

## Additional options:

- CHROMO 2R:** chromotherapy: 2 RGB LED
- CHROMO 4R:** chromotherapy: 4 RGB LED
- CHROMO 12:** chromotherapy: 12 single light sources
- CHROMO 24:** chromotherapy: 24 single light sources
- CHROMO 36:** chromotherapy: 36 single light sources
- 4 LED:** additional light sources at cascade nozzle
- AUDIO:** sound input from an external device such as Hi-Fi, mp3 etc.
- AROMA:** scent container, dosage during treatment





Packing dimensions: **220 x 95 x 100 cm** Weight: **+40 kg**



Length: **195 cm**



Height: **76 cm**



Width: **75 cm**



Weight: **75 kg**



Capacity: **240/300 l**

**Balmed** is a modern medical bath tub specially designed for balneology baths. It is ideal tub for health resort Facilities and SPA & Wellness centers.

## Features:

- Basin made of high quality acrylic (fibreglass mat reinforced) resistant to temperature, some chemicals and mineral waters
- Basin available in two colours: white or calypso green
- Large diameter of drain for fast emptying of the bath tub
- Fittings and finishing elements are made of acid-resisting steel
- Ergonomically shaped basin
- Timer: 1-9:59 min (only with option AIR 64)
- Fast filling thanks to the use of two filling nozzles
- Water supply: warm and cold
- Shower
- Up to 3 types of media: water saturated with CO<sub>2</sub>, warm or cold brine, warm or cold sulfide water
- Capacity dependent on version:  
**STANDARD:** 150-300 l  
**ECO:** use of water 140-240 l reducing treatment costs
- Temperature sensor

## Technical data:

	ECO	STANDARD
Treatment capacity (minimum) [l]:	140	150
Volume up to overflow [l]:	240	300
Filling* / drainage** [s]:	142/140	165/162
Number of filling nozzles:	2	2
Supply voltage [V/Hz]:	230/50	230/50

\* 2x Ø 3/4" DN20, 5 bar

\*\* Drain tube of min. 100 mm in diameter, ensuring the minimum flow rate of 3,5 l/s

## Standard accessories:

- Steps

## Treatment possibilities:

- Balneologic treatment: sodium chloride waters (saline waters) bicarbonate water, thermal water, sulfide water
- Baths with addition of liquid mud (special liquid concentrate)
- Bear baths
- Pearllet baths (AIR 64)
- Chromotherapy (CHROMO)

## Additional options:

**AIR 64:** 64 aeration nozzles to air bubble massage, air heating system, independent air pump (not possible with mud baths)

**CHROMO 12:** chromotherapy: 12 single light sources

**CHROMO 24:** chromotherapy: 24 single light sources

**FOOTREST:** support for feet

## Available models:

Models:	Number of valves	Warm water	Cold water	Shower	Medium 1	Medium 2	Medium 3
<b>Balmed ECO / STANDARD</b>	3	●	●	●			
<b>Balmed ECO / STANDARD</b>	4	●	●	●	●		
<b>Balmed ECO / STANDARD</b>	5	●	●	●	●	●	
<b>Balmed ECO / STANDARD</b>	6	●	●	●	●	●	●

To order it is necessary to choose model and version, for example:  
**BALMED 6 STANDARD** - tub allowing connect up to 3 types of media.





**The Only chamber available on the market that allows to perform both 'dry' CO<sub>2</sub> baths and ozone baths.**

The device works automatically and features a build-in counter showing the duration of a therapy session on the control panel. The chamber for CO<sub>2</sub>/O<sub>3</sub> baths is equipped with an innovative control system enabling adjustment of therapy parameters, such as temperature, dose of therapeutic gas and duration. When the sound signal indicates its end, therapeutic session is completed, the chamber is automatically emptied of gas and the sound signal indicates its end.

## Carbon dioxide baths

are intended for patients who due to certain diseases cannot undergo rehabilitation with standard carbonic-acid baths involving additional patient load with hydrostatic pressure.

Dry therapeutic sessions disallowing application of carbonic-acid baths causing excessive thermal and hydrostatic load. 'Dry' CO<sub>2</sub> baths do not require taking off outer clothes. They can also replace 'wet' baths for patients with reduced mobility as they provide better access to the therapeutic equipment.

## Ozone baths

Ozone used for therapeutic applications is not pure gas. It usually consists of ozone and oxygen or ozone and air mixtures. For over a hundred years ozone has been used in medicine as sterilising and disinfecting agent, as well as substance improving cellular metabolism by providing tissues with increased oxygen supply.

Ozone and oxygen mixture improves peripheral blood circulation in lower limbs, increases oxidation of ischemic tissues, possesses anticoagulant and antiatherosclerotic properties and serves as a disinfectant for wounds and ulcers. When applied in higher concentrations, it destroys bacteria and viruses, whereas in lower, it stimulates healing of wounds, burns, ulcers and bedsores. It is also characterised by immunostimulating properties.

## CO<sub>2</sub> baths - indications:

- Circulation disorders in peripheral arteries
- Cardiovascular diseases
- Rheumatic diseases
- Burns
- Frostbites
- Shank ulcerations
- Hypertomia / hypotomia
- Diabetic and arterio-venous gangrenas

## O<sub>3</sub> baths - indications:


- Peripheral vessel diseases (peripheral arterial circulation disorders)
- Arterial hypertension and hypotension
- Chronic diseases of musculoskeletal system: rheumatic and arthritic diseases
- Posttraumatic rehabilitation
- All kinds of neurosis, e.g. hyperactivity
- Insomnia
- Protein-fat metabolism disorder (obesity)
- Intestine peristalsis disorders
- Flatulences
- Chronic gynaecological conditions and depression characteristic of climacterium, irregular and painful menstruations
- Decreased sexual potency (bath with aromatherapy)
- Chronic skin diseases (inflammations, certain types of eczema, psoriasis and fungus)
- Bedsores, trophic ulcers with infectious lesions
- Feet hyperhidrosis
- Cerebral palsy
- Paresis in the meningo-myelocoele area
- Ehlers-Danlos syndrome
- Hypertonia / hypotomia
- In cosmetic medicine: reducing and preventing cellulite, stretch marks, postoperative oedemas and adverse aesthetic phenomena resulting from climacterium, pregnancy, delivery and intensive slimming therapy


## Technical data:

Power supply [V/Hz]:	230/50
Max. power consumption [kW]:	2,4
Dimensions (H x W x D) [cm]:	120 x 120 x 180
Duration of a therapy session [min]:	5-30
Temperature [°C]:	30-40
CO <sub>2</sub> average consumption [kg]:	20 per 160 sessions





 Packing dimensions: **215 x 80 x 110 cm** Weight: **+40 kg**

 Packing dimensions: **240 x 80 x 140 cm** Weight: **+20 kg**

- 1. Safety valve
- 2. H<sub>2</sub>O delivery system
- 3. CO<sub>2</sub> delivery system
- 4. Control panel
- 5. Saturator column
- 6. Safety valve drain
- 7. Saturated water drainage system

**Carbosat** is a modern device for baths in carbon dioxide. The device operates in a continuous mode - the user can retrieve the water saturated with CO<sub>2</sub> continuously, which allows to run 5 carbon dioxide treatments simultaneously.

### Features:

- Water efficiently saturated with carbon dioxide (50 l/min.)
- High level of carbon dioxide saturation in water (2 g/l)
- Maximum number of connected Balmed bath tubs - 5
- Gauge indicating the pressure in the water supply network
- Electrowalve automatically regulates the water supply
- Gauge indicating the pressure in the carbon dioxide supply network
- Electronic control panel
- Light indicates tank filling level
- Stainless steel tank (approx. 160 l) with ceramic rings, accelerating water saturation
- Safety guaranteed by usage of certified container

### Technical data:

Efficiency [l/min.]:	50
CO <sub>2</sub> saturation level [g/l]:	2
Dimensions (height x diameter) [cm]:	187 x 32,4
Weight [kg]:	140
Power consumption [W]:	60
Power supply [V/Hz]:	230/50

**Carbomed** is modern device for "dry" baths in carbon dioxide.

### Carbon dioxide baths (CO<sub>2</sub>) - indications:

- Rheumatic diseases
- Circulatory system illnesses
- Circulation disturbances of peripheral arterial vessels
- Burns and frostbites
- Hypo- and hypertonia
- Ulceration of shank
- Gangrene: diabetic, arteriosclerotic, angiospastic

### Features:

- Fully automated treatment
- Effective and fast sealing of treatment chamber
- Automated refilling of CO<sub>2</sub> and circulation of gas inside treatment chamber allows stable and high gas concentration in treatment area
- Automated humidation of CO<sub>2</sub> increases efficiency of treatment since the start
- Gas temperature may be regulated from 30°C to 40°C (+/- 1°)
- Sound signal after end of treatment
- Controlled piping away of CO<sub>2</sub> after end of treatment
- Mobile bed construction
- Regulated position of head support

### Technical data:

Dimensions (L x W x H) [cm]:	215 x 70x 98
Height of laying level [cm]:	59
Power supply [V/Hz]:	230/50
Usage of CO <sub>2</sub> [l/min]:	average 18




# Aquai | Device for dry hydromassage




**AQUAI** has wide range of uses: it is used in the wellness and fitness areas. It perfectly suits rehabilitation centers. It is also a very good option for relaxation rooms in companies.

A patient in a rehabilitation center or a guest in a SPA center can experience the beneficial power of hydrojet massage without getting wet. The massage is done through a layer of plastic coat.

 Packing dimensions: **255 x 135 x 130 cm** Weight: **+50 kg**

 Length: **237 cm**

 Height: **70 cm**

 Width: **114 cm**

 Weight: **190/410 kg**

 Capacity: **220 l**

## Advantages of the treatment:

- Improvement in blood circulation and metabolism
- Increase in oxygen transport in muscles
- Improvement in movement range of extremities
- Tension relief
- Stress reduction and relaxation
- Well-being


## Features:

- 6 programmable and independent zones
- Jets can work simultaneously or in zones
- Dry water massage nozzles with increased durability
- 6 standard programs
- 1 user program
- Membrane surface temperature setting: temperature adjustable from 30 to 40°C
- Adjustable treatment time (1-30 min)
- Delayed start at programmed number of hours
- Adjustable frequency and sequence of zones
- Integrated heating system
- Internal water cooling system maintains water temperature during preset hours regardless of the number of treatments
- No need to connect to water tap
- Easily accessible modern colour touch panel
- LED lighting at the base

## Technical data:

Dimensions (L x W x H) [cm]:	237 x 114 x 70
Capacity [l]:	220
Weight (empty/filled with water) [kg]:	190/410
Max. load [kg]:	135
Power supply [V/Hz]:	230/50 or 400/50


## Massage zones:

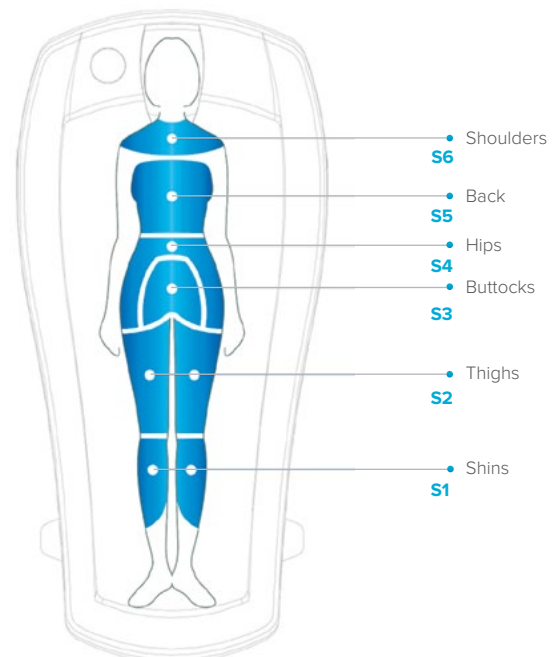

## Additional options:

**AUDIO:** sound input from an external device such as Hi-Fi, mp3 etc.

**CARD MANAGER:** a system supporting the sale of treatment sessions using stored-value cards; together with top-up software.





# Ekopompa

A closed-cycle water supply station for Aquavibron massage apparatus



The station makes it possible to conduct treatment procedures in a proecological manner with water circulating in a closed cycle producing vibrations in the membrane of the **Aquavibron** device. Procedures can be carried out at patient's bed. Closed water cycle makes the massage independent from the water supply and sewage disposal system. It utilizes all the advantages of Aquavibron.



Packing dimensions: **55 x 80 x 104 cm** Weight: **+20 kg**



Length: **63 cm**



Height: **87 cm**



Width: **50 cm**



Weight: **40 kg**




Capacity: **10 l**

## Features:

- An environmentally-friendly device: low water consumption, no sewage
- Protection against electric shock with a differential current switch
- Adjustable massage force allows the therapist to set a gentle massaging intensity for more sensitive areas
- Water pressure is maintained by the pump supplied from the 230 VAC/50 Hz mains
- Ekopompa uses water stored in a built-in 10 litre tank
- Air flow forced by a fan ensures maintaining proper water temperature in the device
- 2 feet + 2 wheels (without brakes)
- Small dimensions
- Easy operation and functionality
- Easily connected to the original Aquavibron MEDIMARK device without conversions or modifications hindering its functionality
- High quality finish (steel handles, easily cleaned surface)
- Handle for the suspension of the Aquavibron apparatus
- Suitable for use in sanitariums, SPA centers and private surgeries


## Technical data:

Container capacity min./max. [l]:	7-10
Power consumption [kW]:	0,6
Supply voltage [V/Hz]:	230/50
Dimensions (L x W x H) [mm]:	63 x 50 x 87
Weight [kg]:	40

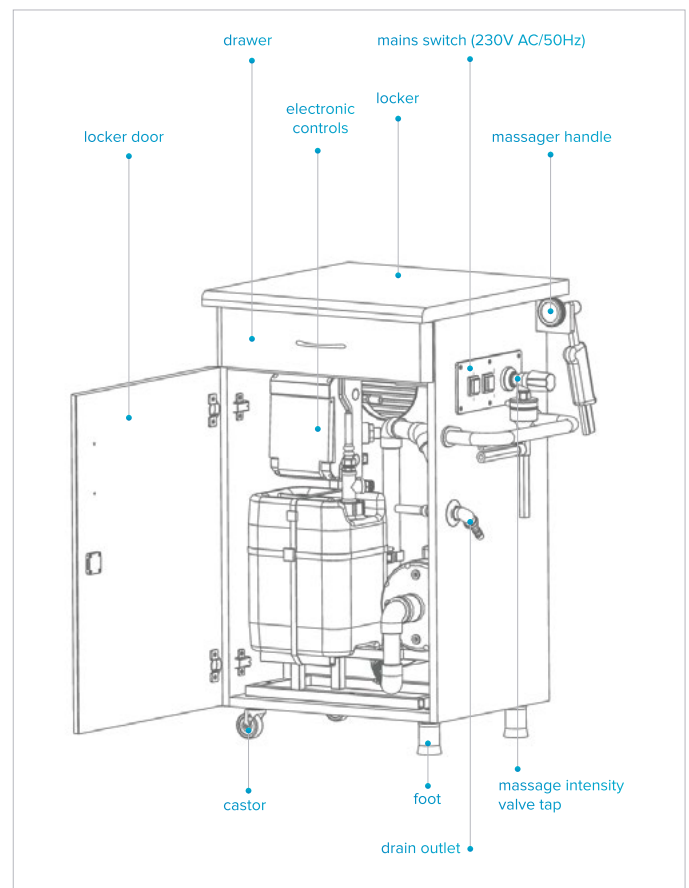


# Aquamobil | Mobile water massage unit



 Packing dimensions: **67 x 90 x 125 cm** Weight: **+20 kg**

 Length: **42 cm**

 Height: **95 cm**

 Width: **67 cm**

 Weight: **55 kg**

 Pressure: **4 bar**

## Advantages of the treatment:

Allows to perform professional underwater massage in standard tubs at SPAs, hospitals or home. Handheld hose with a set of interchangeable nozzles gives a relaxing, deep massage to the muscles or subcutaneous tissues.

## Features:

- Fibreglass casing with special reinforcements
- Maximum mobility with 2 long, flexible hoses (massage and water feed)
- Robust, standalone unit with 4 castors with brakes
- Clean and simple top panel with elegant chromium-plated tap
- Pressure control gauge
- 3 interchangeable water nozzles
- Electronic control panel with thermometer
- Built-in disinfection system
- Pump „dry-run” protection
- Transport handles
- Power switch at the front of the apparatus

## Technical data:

Pressure control [bar]:	0-4
Power consumption [kW]:	1
Supply voltage [V/Hz]:	230/50
Dimensions (L x W x H) [mm]:	42 x 67 x 95
Weight [kg]:	55
Length of hoses [m]:	2,5 (longer-option)





NPL2



Console packing dimensions: **86 x 71 x 130 cm** Weight: **55 kg**



Cage packing dimensions: **120 x 100 x 165 cm** Weight: **45 kg**

## Bryza type NPL2\* features:

- Free-standing console made from gelcoat reinforced with glass fiber
- Temperature control of one water source (1 thermostat)
- Lever for fast temperature changes
- Valve to regulate pressure and cut off the water
- Compensation tank for the reduction of small water pressure fluctuations in the water system
- Thermometer

## Bryza type NPLE\* features:

- Free-standing console made from gelcoat reinforced with glass fiber
- Temperature sensor
- Independent temperature control of two water sources (2 thermostates)
- Automatic changes of temperature between cold and warm water
- Electronic control panel with temperature indication
- Console has to be permanently connected to the electric system
- 3 standard programs, 4 user programs
- Compensation tank for reduction of small water pressure fluctuations in the water system

\* There are possible versions with PUMP stabilizing pressure



Shower cabin **Bryza** is dedicated to conduct a therapeutic procedure using water massaging properties and temperature. Appropriately arranged water jets, spray water under high pressure, massaging the patient's body uniformly. Jet console **Bryza** allows the therapist to control the water pressure and temperature, whereby the treatment can influence the patient in different ways. Popular procedures include alternately showers during the treatment a rapid change of temperature is used.

## Treatment possibilities:

- Cold and cool showers - with water temperature between 10-20°C. Shower lasts from a few seconds to a minute. Water showers toughen the body, stimulate metabolism and raise the blood pressure. Often used after hot hydrotherapy procedures, like balneological bath or sauna.
- Warm showers - with water temperature between 32-37°C. Shower lasts from 3 to 5 minutes. Recommended in neurosis, sleeplessness and neuralgias.
- Hot showers - water temperature between 38-42°C. Shower duration takes 5-10 minutes. It stimulates metabolism, increases sweating and vasodilation, lowers the blood pressure. Hot showers provide general relaxation and sedation of the patient.
- Cold / warm showers - water temperature 32-37°C for approx. 1 minute, then 10-20°C for approx. 30 sec. Shower duration should last for 5 minutes. It toughens the body, relaxes and stimulates metabolism of the patient.

## Cage features:

- Piping of the shower cage is made from corrosion-resistant materials
- Shower cage is operated from a dedicated console NPL2 or NPLE
- Shower head
- 2 independent zones: 1-shower from above, 2-shower from sides

## Technical data:

Cold and warm water pressure [bar]:	4-6
Warm water temperature [°C]:	max. 60
Power supply (applicable to NPLE and option with PUMP) [V/Hz]:	230/50
Installed power (applicable to NPLE) [W]:	max. 25
Power consumption (version with PUMP) [kW]:	0,8
Dimensions NPL2 (H x W x L) [cm]:	100 x 67 x 56
Dimensions NPLE (H x W x L) [cm]:	100 x 67 x 55
Dimensions CAGE (H x W x L) [cm]:	226 x 89 x 95





Packing dimensions: **86 x 71 x 130 cm** Weight: **55 kg**

## Applications:

**Orkan** whip showers allow to use thermal and mechanical water properties during therapeutic treatment. Using stimuli provided by the stream of water and rapid water temperature changes, the therapeutic procedure can affect patient in different ways, for example: stimulate or sedate, increase or decrease the blood pressure.

## Orkan type NBC1 features:

- Free-standing console
- 2 manometers and 2 thermometers (independent for each jet gun)
- Water jet dispersion adjustment (independent for both jet guns)
- The ability to work with two jet guns at the same time
- The jet guns rotatable within the treatment area
- The jet guns equipped with triggers initiating water massage (with a lock allowing for continuous massage) with forearm support
- 2 thermostatic taps for independent temperature adjustment for the two jet guns
- 2 water massage intensity (pressure) adjustment and shut-off valves independent for the two jet guns

## Technical data:

Warm and cold water pressure [bar]:	4-6
Warm water temperature [°C]:	max. 60
Power supply (applicable to NBC2E) [V/Hz]:	230/50
Installed power (applicable to NBC2E) [kW]:	0,9
Dimensions NBC1 (H x W x L) [cm]:	115 x 67 x 55
Dimensions NBC2/NBC2E (H x W x L) [cm]:	100 x 71 x 55



Packing dimensions: **86 x 71 x 130 cm** Weight (NBC2/NBC2E): **56/59 kg**

## Orkan type NBC2 features:

- Free-standing console
- Manometer, thermometer
- 3 jets (for pouring, scattered and dense water stream)
- Quick water temperature adjustment lever allowing for switching between hot water and cold water from the thermostates
- 2 thermostatic taps for smooth temperature adjustment (independent for cold and warm water)
- Compensation tank for the reduction of small water pressure fluctuation in water system
- 3 valves to regulate and cut off the pressure

## Orkan type NBC2E features:

- Free-standing console
- The pump stabilizing pressure for use in case of low pressure in the water supply network
- Manometer, thermometer
- 3 jets (for pouring, scattered and dense water stream)
- Quick water temperature adjustment lever allowing for switching between hot and cold water from the thermostates
- 2 thermostatic taps for smooth temperature adjustment (independent for cold and warm water)
- 3 water massage intensity (pressure) adjustment and shut-off valves independent for each of the hoses
- Compensation tank

# Accessories

## Headrests:



Orionmed, Balmed



Aquai



Aquanea

## Steps and chairs:



Rectangular steps without handrail (WKD, WKR, Orionmed, Aquameden, Balmed, Aquaray)



Oval steps without handrail (Aquanea)



Rectangular steps with handrail - option




Swivel chair (WKS, WKG)

## Standard basin colours:



White

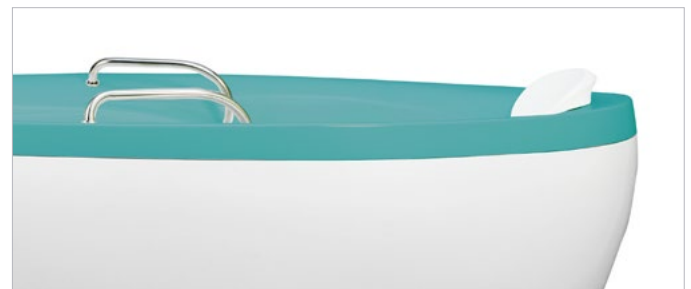

Calypso green

## Products for maintenance:



**Septer** - bath tub disinfectant, package 1 l.



**Kamix** - descaling agent for bath tubs water system, package 25 kg.



**Kristalin** - cleaner for hydromassage bath tubs, package 1 l.



# Water Cycle Pro

Professional bike for resistance exercises in water



Packing dimensions: **120 x 80 x 150 cm** Weight: **+7 kg**

**Water Cycle Pro** is a professional bike for exercises in swimming pools (depth: 110-160 cm). Smooth adjustable resistance provides rehabilitation training and fitness activities.

Possibility of leveling the bike in pools with sloped bottom. Adjustment system allows taking a comfortable position during the training.

## Features:

- Adjustment of the resistance by means of a knob
- Height adjustment
- Adjustment of saddle and handlebar position
- Transport wheels in front of bike for easy placing in water on the wall of the pool
- Frame made from stainless steel (316L), electropolished, with the highest resistance for pool environment
- Saddle adapted to work in water without losing its properties
- Stability, reliability and easy to use

## Technical data:

Length [cm]:	105-121,5
Width [cm]:	65
Height [cm]:	112-153
Saddle height adjustment [cm]:	95-136,5
Handlebar height adjustment [cm]:	102-143 / 112-153
Height adjustment of axis level of the crank mechanism [cm]:	34-52,5
Adjustment of saddle sliding [cm]:	0-8
Adjustment of handlebar sliding [cm]:	0-12
Max. load [kg]:	≤ 150
Mass [kg]:	32

## Application:

The device is used for the rehabilitation of people with spinal column problems, arthritis, problems with cardiovascular and respiratory system, as well as with osteoporosis.

Construction of the device allows to perform movements in the water without loading of the joints. It favors rehabilitation after injuries, operations and elimination of oedema.





Hydrotherapy is an excellent method of rehabilitation, physical workout, weight losing process. **Aquamotion** water treadmill is an exceptional and professional medical product for underwater treatments.

## Conditions for which AQUAMOTION water treadmill is indicated:

- Improving balance and movement coordination, including improving posture and movement stability,
- Increasing the range of angular movements,
- Scoliosis and faulty posture,
- Degeneration and inflammation of joints, limbs and spine,
- Cerebral palsy,
- Autism,
- ADHD,
- Choreoathetosis,
- Cardiovascular system diseases (improving cardiovascular competence),
- Hypertension,
- Sports rehabilitation-development of musculature, improvement of capacity and strengthening of muscles.

## Safety of patients:



In order to ensure maximum safety for the patients and therapists, Standard and Comfort models of **Aquamotion** water treadmills meet all the requirements for medical devices, which are confirmed with certificates issued by TÜV NORD.

## Why a water treadmill?

Hydrotherapy is the best method of rehabilitation and fighting overweight. Underwater therapy may be used just before and soon after surgery. It allows early intervention and faster recovery of the body. Water resistance improves the whole musculo-skeletal system and reduces joint stiffness. It brings more benefits of work out and improves motility of the musculo-skeletal system. It also reduces pain and increases blood flow.

The natural buoyancy of water lowers the relative body weight, which reduces burden on joints. Therefore, water treadmill work out may be used by patients for which training on a dry treadmill or outdoors is contraindicated or impossible. The device offered by us combines exceptional functionality and compact structure. It may be installed in places where the use of a traditional pool is restricted due to location or costs.



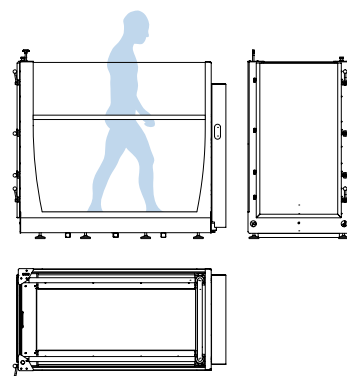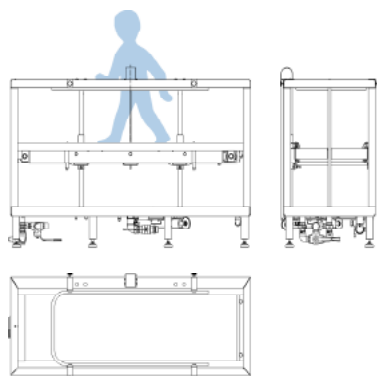

## Aquamotion Junior, Aquamotion Junior Plus

Two models of treadmill are intended for children rehabilitation. It is characterized by extremely compact design. It can be placed in small rooms from 9 m<sup>2</sup>. The most important advantage for the therapist is no need to get into the water, and work with the child in an upright position. The water level is constant. The immersion depth of the patient is controlled by lowering and hoisting the treadmill inside of the pool.

## Aquamotion, Aquamotion Sport, Aquamotion Comfort

Models for adults. Wide glass doors allow patient on wheelchairs get close to the treadmill. Belt speed is adjusted to rehabilitation or sportsman condition training. Glass walls allow monitoring the course of therapy as well as sport exercises. In standard counterflow jets are included - they induce additional resistance during walking. Thanks to the hydraulic drive system, there is no risk of electric shock in the water.

	Aquamotion Junior	Aquamotion Junior Plus	Aquamotion	Aquamotion Comfort	Aquamotion Sport
Intended use:	younger children	older children	children/adults	children/adults	sportsmen
Maximum growth of patient [cm]:	140	160	unlimited	unlimited	unlimited
Maximum weight of patient [kg]:	50	50	135	135	135
Maximum speed [km/h]:	2	2	9	9	12
Depth of patient's immersion in water [cm]:	10-65	30-85	0-120	0-120	0-120
Water net volume [l]:	800	1000	1600	1600	1600
Work of therapist without entering water:	S	S	-	-	-
Entry from top, movable floor:	S	S	-	-	-
Entry through the open door:	-	-	S	S	S
Net weight without water and control cabinets [kg]:	400	450	550	550	550
Length [mm]:	1700	1700	1780	1780	1780
Width [mm]:	670	670	930	930	930
Height [mm]:	1170	1370	1580	1580	1580
Heating power [kW]:	6	6	12	12	12
Storage water tank:	-	-	S	S	S
Counterflow:	S	S	S	S	S
Heat exchanger for solar installation, heat pump or central heating:	O	O	O	O	O
Connection to pool installation:	O	O	O	O	O
Sand filter:	S	S	S	S	S
Automatic chlorine dosing and water pH regulation:	O	O	O	O	O
UV lamp:	O	O	O	O	O
Insurance ceiling lift:	O	O	O	O	O
Hydraulic drive system (eliminating of using electricity for treadmill drive):	S	S	S	S	S
Safety laminated glass enabling monitoring of the therapy:	S	S	S	S	S
Water-resistant desktop with an LCD panel:	S	S	S	-	S
Water-resistant desktop with a colourful touch-screen LCD display	O	O	-	S	-
Heat system control by application (www, iPhone, Android):	O	O	O	O	O
Thermal casing minimising heat loss:	O	O	O	O	O
Power supply 400 V:	S	S	S	S	S
Power supply 230 V:	O	O	-	-	-

S - standard, O - option







#### F-40, F-40/B, F-40/P



Packing dimensions: **80 x 80 x 96** cm Weight: **+15** kg

#### B-130L



Packing dimensions: **120 x 110 x 150** cm Weight: **+40** kg

#### C-14



Packing dimensions: **80 x 80 x 98** cm Weight: **+15** kg



**F-40** - device for melting fango-paraffin mass for thermal therapy procedures and keeping it at a set temperature.

**F-40/B, B-85L, B-130L, B-200L** - device for heating and mixing mud mass for thermal therapy procedures and keeping it at a set temperature.

**F-40/P** - device for melting paraffin mass for thermal therapy procedures and keeping it at a set temperature.

**C-14** - device for heating and keeping the mass at a specified temperature range.

### The electronic controller enables programming of the following functions:

- **Heating (F-40, F-40/P, F-40/B, B-85L, B-130L, B-200L):** normal operation in range of temperature
- **Mixing (F-40, F-40/P):** forced mass mixing
- **Sterilization (F-40, F-40/P)**
- **Start in (F-40, F-40/P, F-40/B, B-85L, B-130L, B-200L, C-14):** delayed start after a programmed number of hours
- **Constant work (C-14):** normal operation in range of temperature
- **Daily cycle (C-14):** time of the heating cycle (on/off) repeated daily

### Features F-40, F-40/P, F-40/B, B-85L, B-130L, B-200L:

- Used materials are resistant to corrosion (stainless steel)
- Special construction of the tank ensures minimum heat losses
- Microprocessor-controlled electronics guarantees minimum energy consumption
- Consists of a tank with a cover
- Mixer equipped with an automatic mixing arm
- Mixing arm is started every few minutes to maintain temperature and suitable consistency of the mass in the container
- Drain valve of the mixer is heated, which prevents the mass from congealing (F-40, F-40/P)
- The mixing arm drive is stopped automatically when the cover is lifted
- Adjustment of temperature
- Electronic controller
- Oil jacket (B-85L, B-130L and B-200L)- very low energy consumption

### Features C-14:

- For storing mass on trays placed inside the heating unit
- Heater with a fan keeps the preset temperature
- Microprocessor-controlled electronics and electronic controller
- Used materials are resistant to corrosion (stainless steel)

### Technical data:

	<b>F-40</b>	<b>F-40/P</b>	<b>F-40/B</b>	<b>B-85L</b>	<b>B-130L</b>	<b>B-200L</b>	<b>C-14</b>
Temperature range [°C]	55-80	55-80	30-60	30-60	30-60	30-60	25-80
Working volume of container [l]:	40	40	40	85	130	200	14 trays (40 x 60cm)
Sterilization temperature [°C]:	130	110	-	-	-	-	-
Power supply [V/Hz]:	400/50	400/50	400/50	400/50	400/50	400/50	230/50
Dimension (L x W x H) [cm]:	66 x 64 x 75	66 x 64 x 75	66 x 64 x 75	97 x 76 x 118	99 x 86 x 132	101 x 97 x 132	76 x 68 x 78
Power consumption [kW]:	2,3	2,3	2,3	2,1	3,3	3,6	2,3
Weight [kg]:	90	90	95	250 (300 with oil inside)	260 (360 with oil inside)	280 (380 with oil inside)	99



# Pacific Fiji


7-section professional couch for Medical SPA & Wellness

# Pacific Hawaii

2 & 4-section professional couch for Medical SPA & Wellness



 Box dimensions: **220 x 95 x 95 cm** Weight: **+50 kg**

 Height: **64-104 cm**

 Width: **80 cm**


Professional SPA salon or Wellness centre requires highest quality equipment. To meet the needs of the most demanding customers we designed the **Fiji** and **Hawaii** couch. Exclusive 7-, 4- or 2-section couches are made with the highest care from materials providing trouble-free operation for many years. Aesthetic design will turn your surgery into a unique place where everyone will feel special.

## Additional option:

- Integrated option of heating and LED lights

## Features:

- 7-section massage couch with electric height adjustment by the means of a remote (controller)
- Head section adjustment by the means of gas spring
- Head rest with shaped face hole with crescent plug
- Foldable armrests lowered till 20 cm
- Adjustment of: back, thighs, shanks sections by means of electric motors
- Multi-layered and very soft upholstery of 15 cm thickness
- Trendelenburg / reverse Trendelenburg position (15°)
- 2 wheels

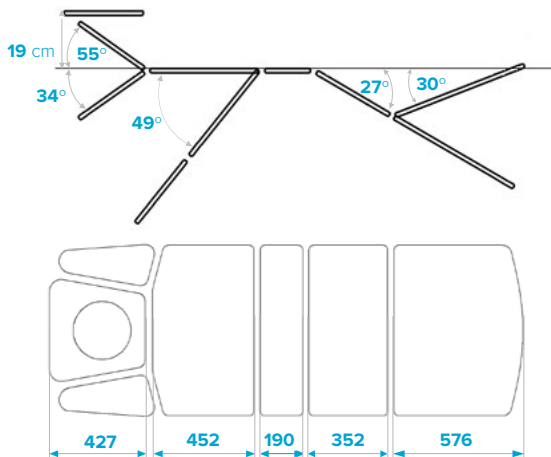

 Length: **211 cm (Fiji), 198 cm (Hawaii)**

 Weight: **130 kg**


 Max. load: **200 kg**

## Technical data:

	FIJI	HAWAII
Number of sections:	7	2 or 4
Height adjustment [cm]:	64-104	64-104
Dimensions (L x W) [cm]:	211 x 80	198 x 80
Weight [kg]:	130	130
Max. lifting capacity [kg]:	200	200
Power supply [V/Hz]:	230/50	230/50

## Features:

- 2-section or 4-section massage couch with electric height adjustment by the means of a remote (controller)
- Head section adjustment by the means of gas spring
- Head rest with shaped face hole with crescent plug
- Foldable armrests lowered till max. 20 cm (only in version 4-section)
- Multi-layered and very soft upholstery of 15 cm thickness
- Trendelenburg / reverse Trendelenburg position (15°)
- 2 wheels

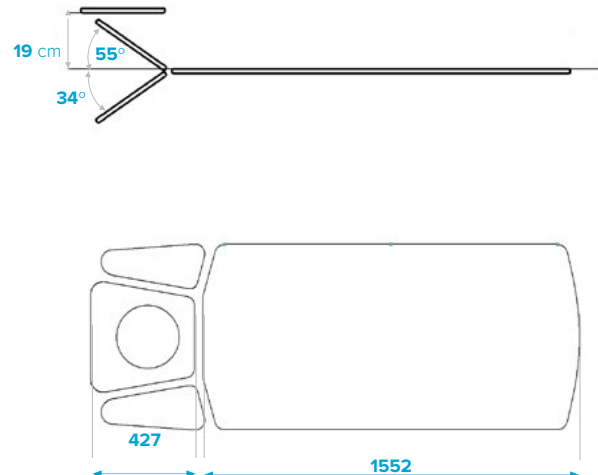

# Terapeuta Prestige Line



## Technical data:

	M-S2	M-S3	M-P3	M-S4	M-S5	M-P5	M-S7	M-P7	E-S2	O-S5	O-P5
Dimensions (length x width) [cm]:	202 x 69	205 x 69	205 x 69	202 x 69	205 x 69	205 x 69	205 x 69	205 x 69	205 x 69	205 x 59	205 x 59
Number of sections:	2	3	3	4	5	5	7	7	2	5	5
Head-rest inclination angle [°]:	-70/+40	-70/+40	-70/+40	-70/+40	-70/+40	-70/+40	-70/+40	-70/+40	0/+85	-70/+40	-70/+40
Middle section inclination angle [°]:	-	-	0/+30	--	-	0/+30	-	0/+30	-	-	0/+30
Foot-rest inclination angle [°]:	-	0/+85	-30/+85	-	0/+85	-30/+85	0/+85	-30/+85	-	0/+85	-30/+85
Height adjustment [cm]:	47-95	47-95	51-99	47-95	47-95	51-99	47-95	51-99	47-95	47-95	51-99
Weight FO/F4 [kg]:	80/95	85/100	95/110	87/102	92/107	102/117	95/110	105/120	80/95	92/107	102/117
Max. lifting capacity [kg]:	225	225	225	225	225	225	225	225	225	225	225
Power supply [V/Hz]:	230/50	230/50	230/50	230/50	230/50	230/50	230/50	230/50	230/50	230/50	230/50
Max. working load [kg]:	350	350	350	350	350	350	350	350	350	350	350



Powerful electric motor



Adjustment of postural drainage



Breathing slot shaped to place the nose and chin



Personal Authorization Safety System (PASS)



Non-slip feet with 1 cm height adjustment

# Safari Line




## Technical data:

	Puma S2	Puma E-S2	Puma S4	Leopard S3	Leopard S5	Jaguar P3	Jaguar P5
Dimensions (length x width) [cm]:	202 x 69 (80)	211 x 69 (80)	202 x 69 (80)	205 x 69 (80)	205 x 69 (80)	205 x 69 (80)	205 x 69 (80)
Number of sections:	2	2	4	3	5	3	5
Head-rest inclination angle [°]:	-70/+40	-20/+85	-70/+40	-70/+40	-70/+40	-70/+40	-70/+40
Middle section inclination angle [°]:	-	-	-	-	--	0/+24	0/+24
Foot-rest inclination angle [°]:	-	-	-	0/+90	0/+90	-12/+90	-12/+90
Height adjustment [cm]:	52-93	52-93	52-93	52-93	52-93	54-95	54-95
Weight F0/F4 [kg]:	86/99	88/103	89/102	93/106	96/109	99/112	102/115
Max. lifting capacity [kg]:	200	200	200	200	200	200	200
Power supply [V/Hz]:	230/50	230/50	230/50	230/50	230/50	230/50	230/50
Max. working load [kg]:	300	300	300	300	300	300	300



Adjustment of head rest

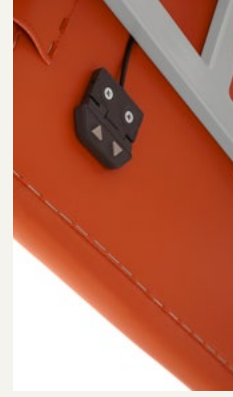

Adjustment of postural drainage



2 types of breathing slot cover:  
round and crescent



Built-in surface heating system  
of table top (Comfort option)



Personal Authorization  
Safety System (PASS)

# Mohican | Adjustable hygiene chair



Mobile hygiene chair with adjustable height and positioning is protected against water, dirt or hair while bathing, shaving or grooming the patient. Adjusted with a manual remote controller for optimal positioning of the patient. Mohican allows for an easy access to the shower and helps in moving the patient around at home or in care facilities of all kinds. Suitable for the elderly or people with all kinds of disabilities who might need help in taking care of their personal hygiene.

## Product overview:



Box dimensions: **120 x 80 x 140 cm** Weight: **+30 kg**

## Product features:

- Grips for easy movement
- Waterproof, easy to clean backrest
- PU foam seat with an opening to help with patient hygiene
- Two waterproofed, dustproofed, battery-powered actuators
- Manual remote controller
- 4 blockable wheels
- Optional headrest for maximum comfort of the patient

## Optional accessories:

- Adjustable chest belt - easy to use
- Velcro straps for legs - easy to remove and clean



1. Lower frame including electric hi-lo actuator and 4 wheels with brakes
2. Upper frame with foldable armrests and electric actuator for backrest positioning
3. Seat that allows the patient to assume a comfortable position while caring for their personal hygiene
4. Adjustable, foldable footrests (removable without tools)
5. Manual remote control to adjust height and seat and backrest positioning




## Technical data:

Size (LxW) [cm]:	110 x 57
Distance between armrests [cm]:	47
Seat tilt [°]:	+7 to -30
Max. load [kg]:	150
Weight [kg]:	44
Height adjustment [cm]:	53-93
Power [V]:	24




# Production and R&D Department

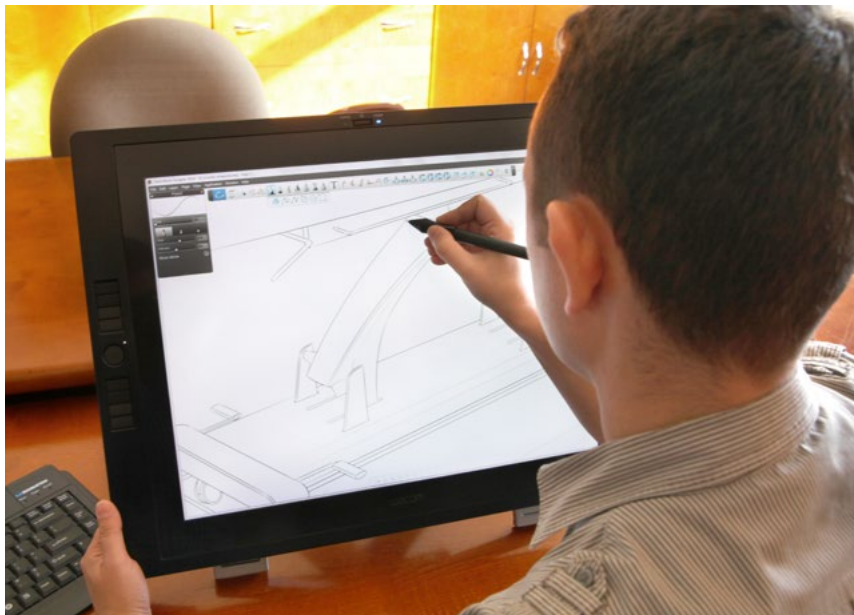


Since the very beginning of our work we produce professional medical devices. Thanks to the investments made, our production lines are equipped with the highest quality devices for mechanical and electronic production. In recent years we have expanded our facilities by purchasing CNC machining centers and powder painting shop. In addition to the excellent machinery, we are proud to boast a qualified research team, and experienced production staff.

Thanks to the modern production technology, the experienced designers team and close cooperation with medical industry representatives - our medical devices are appreciated in Poland and worldwide. Due to the extensive offer of manufacturing capabilities we also provide contract services in the field of design, development and final product manufacturing, based on our own documentation or the documentation provided by the customer.

We look forward to cooperating with you.

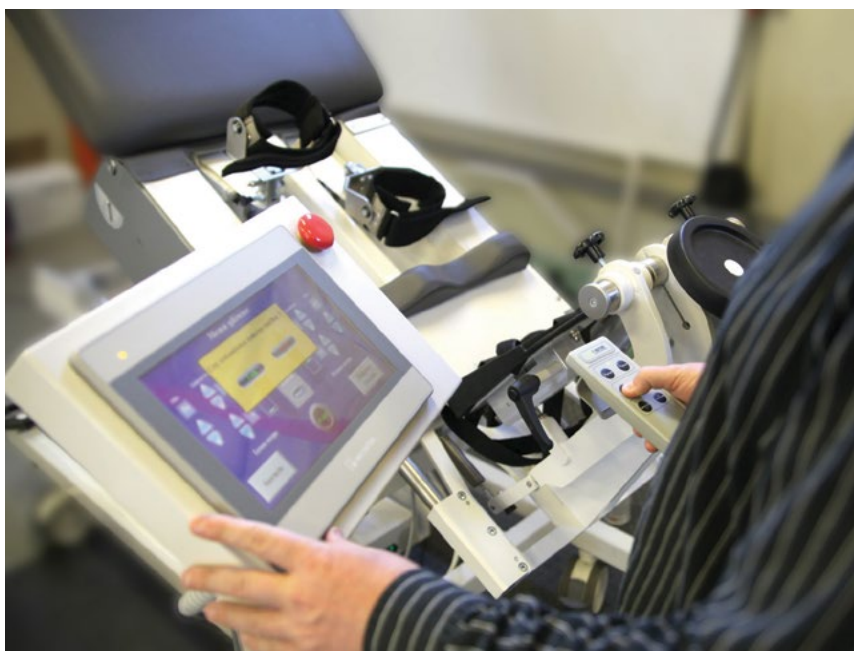


Modern powder painting line

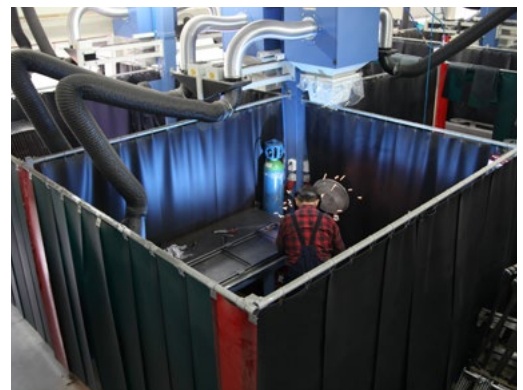

Welding shop



Laser

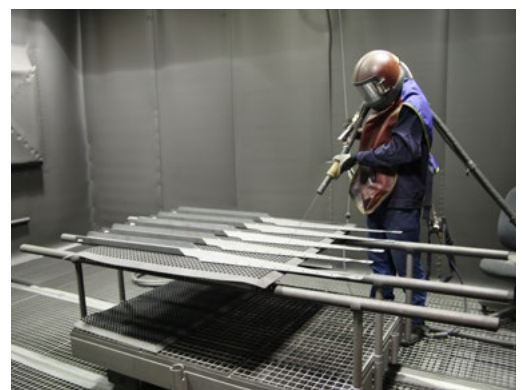

Sand blasting



Manufacturer hereby reserves the right to change design that would not disturb the principal functionality and safety requirements. The colours seen in the catalogue can be differ slightly from the real due to colour printing rendition reasons.

**MEDEN-INMED Sp. z o.o.**

ul. Wenedów 2, 75-847 Koszalin, Poland

Phone: +48 94 344 90 50, +48 94 344 90 78

Fax: +48 94 347 10 41

Mobile: +48 602 668 002, +48 601 646 866

E-mail: [km@meden.com.pl](mailto:km@meden.com.pl), [tg@meden.com.pl](mailto:tg@meden.com.pl)

[www.meden.com.pl](http://www.meden.com.pl)

